




NCK3
Definite Purpose Contactor,
25~90A

1. General

- 1.1 Certificates: VDE, UKrSEPRO, UL;
- 1.2 Application: HVACR;
- 1.3 Utilization category: AC-1, AC-7a, AC-8a;
- 1.4 Rated insulation voltage: 630V;
- 1.5 Standard: UL508

2. Type designation

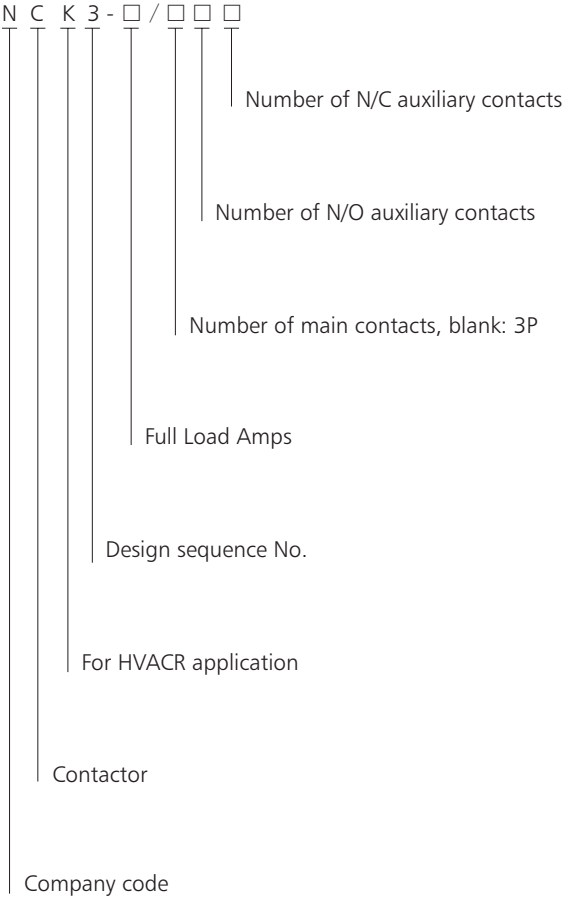

3. Technical data

3.1 Contactor

★ NCK3, 1P+shunt

Model	Full Load Amps (A)	Line Voltage (V)	Locked Rotor Amps (A)	Conventional free air thermal current (A)
NCK3-20/1	20	277	150	32
NCK3-25/1	25	277	150	32
NCK3-30/1	30	277	200	40
NCK3-32/1	32	277	200	40
NCK3-40/1	40	277	240	50

★ NCK3, 1pole+1NC auxiliary contact

Model	Full Load Amps (A)	Line Voltage (V)	Locked Rotor Amps (A)	Conventional free air thermal current (A)
NCK3-20/101	20	277	150	32
NCK3-25/101	25	277	150	32
NCK3-30/101	30	277	200	40
NCK3-32/101	32	277	200	40
NCK3-40/101	40	277	240	50

